




# E-M15-CH SERIES



<b>Contact type</b>	NO
<b>Switching capacity</b>	W 60
<b>Switching current</b>	A 3
<b>Switching voltage</b>	V AC/DC 400
<b>Breakdown voltage</b>	VDC 1000
<b>Contact resistance</b>	$\Omega$ 0.080
<b>Insulation resistance</b>	$\Omega$ $10^{11}$
<b>Capacitance</b>	pF 0.8
<b>Operating frequency</b>	Hz 200
<b>Operating temperature</b>	$^{\circ}\text{C}$ -40 +150
<b>Weight</b>	Kg 0.135
<small>IP-30</small>	
<b>Construction material</b>	High impact polystyrene and nickel-plated brass
<b>Detection</b>	High accuracy. High reliability. 100% repeatability
<b>Reed switch</b>	Compact 3817, GÜNTHER

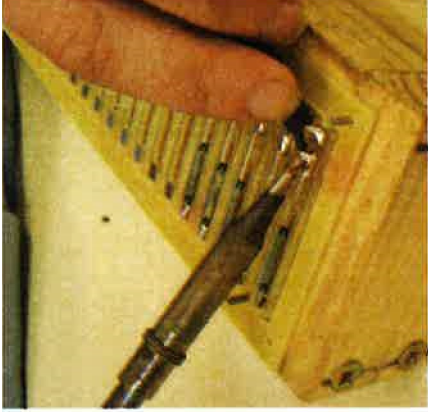