



Lester Control Systems Ltd

Unit D, 18 Imperial Way, Croydon, Surrey, CR0 4RR.

Tel: 020 8288 0668

Fax: 020 8288 0667

Email: info@lestercontrols.co.uk

www.lestercontrols.co.uk

VIC (Voice Indicator and CEDES connection) Board QUICK SETUP GUIDE for use with ALMEGA II

ISSUE: 2 Date: 05/04/2019

1. Pre-Check Information:

- a. Check Materials (e.g. for a typical 8 floor job Simplex)
 - i. 1- VIC (Car Top Connection Board)
 - ii. 1- Speech Connect Cable (as labelled)
 - iii. 1- Indicator Connect Cable (as labelled)
 - iv. DIN RAIL + Fixings
 - v. Self-Adhesive Velcro Tape (as an alternative fixing to the DIN RAIL)

CAR TOP CONNECTION BOARD

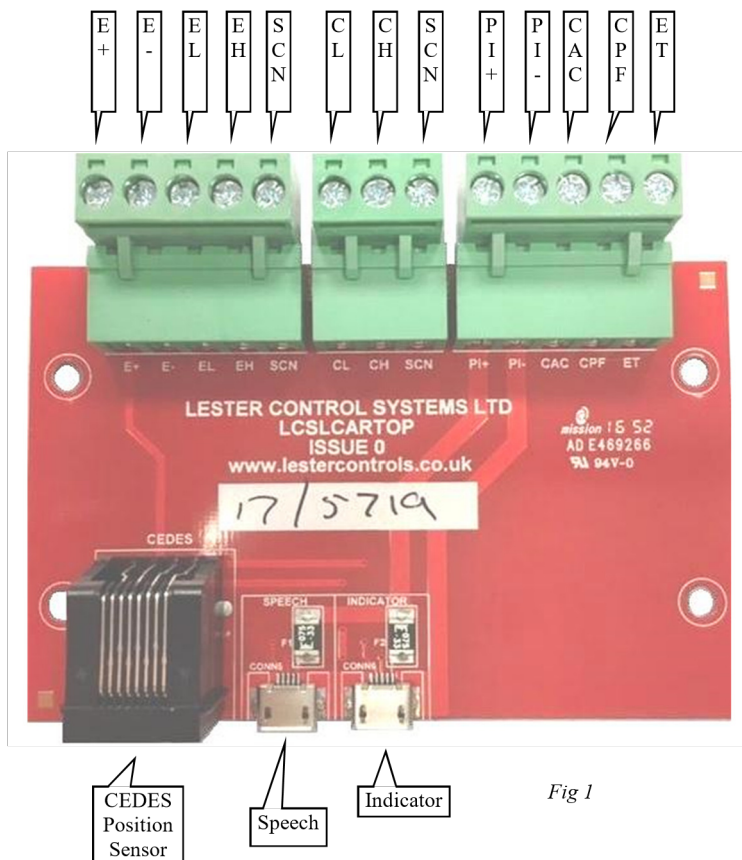


Fig 1

Key	
E+	= Position Encoder +
E-	= Position Encoder – (0V)
EL	= Position Encoder CAN-low
EH	= Position Encoder CAN-high
SCN	= Screen Cable Screen
CL	= Car CAN-low Also Position Encoder 2 nd channel CAN-low (if applicable)
CH	= Car CAN-high Also Position Encoder 2 nd channel CAN-high (if applicable)
SCN	= Screen Cable Screen
PI+	= Position Indicator +
PI-	= Position Indicator – (0V)
CAC	= Car Call Acceptance Feed
CPF	= Car Call Push Feed
ET	= Earth Connection (Screen)

NOTE: SCREENED TWISTED PAIR CABLE MUST BE USED!

System Overview:

